



SPECIAL WOODEN WINDOW (TIMBER WINDOW) HTP-7

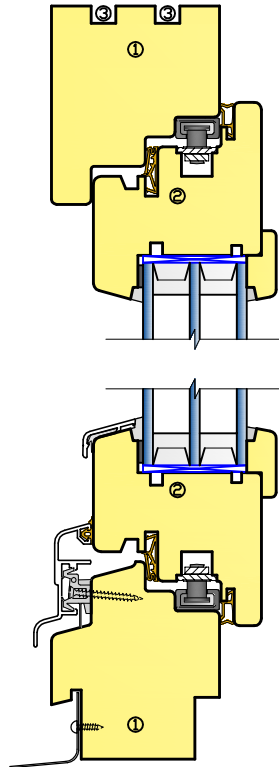


- window thermal conductivity U-1,1 W/m²K*
- glass thermal conductivity U-0,8 W/m²K
- 2 x seal
- 3 x glass **42mm** (4mm clear/LowE + 4mm clear + 4mm clear/LowE)
- 2 x 15mm aluminium glass spacer profile
- 2 x air filling

- ① window frame
- ② window sash
- ③ assembly foam grooves (at the sides and upper edge of the window frame)




* By Estonian standard EVS 837-1:2003 window maximum thermal conductivity is fixed as U-2,1 W/m²K

ENERGY EFFICIENT WOODEN WINDOW (TIMBER WINDOW) HTP-8

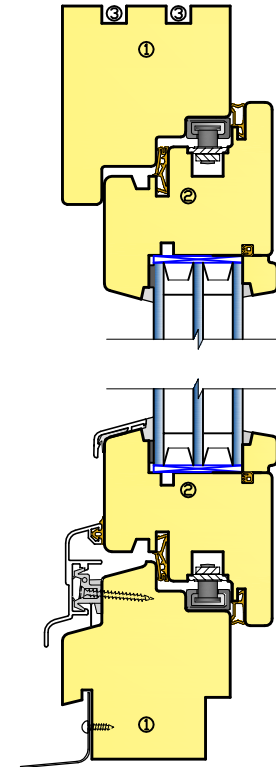

- window thermal conductivity U-1,0 W/m²K*
- glass thermal conductivity U-0,7 W/m²K
- 2 x seal
- 3 x glass **36mm** (4mm clear/LowE + 4mm clear + 4mm clear/LowE)
- 2 x 12mm aluminium glass spacer profile
- 2 x argon filling

- ① window frame
- ② window sash
- ③ assembly foam grooves (at the sides and upper edge of the window frame)

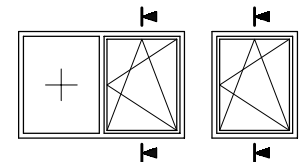

* By Estonian standard EVS 837-1:2003 window maximum thermal conductivity is fixed as U-2,1 W/m²K