



SPECIAL WOOD-ALUMINIUM WINDOW (TIMBER-ALUMINIUM WINDOW)

HTPA-3

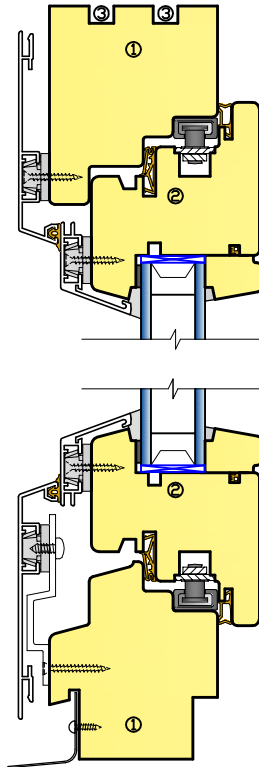

- window thermal conductivity U-1,35 W/m²K*
- glass thermal conductivity U-1,1 W/m²K
- 2 x seal
- 2 x glass **26mm** (4mm clear + 4mm clear/LowE)
- 1 x 18mm aluminium glass spacer profile
- 1 x argon filling


- ① window frame
- ② window sash
- ③ assembly foam grooves (at the sides and upper edge of the window frame)



* By Estonian standard EVS 837-1:2003 window maximum thermal conductivity is fixed as U-2,1 W/m²K


SPECIAL WOOD-ALUMINIUM WINDOW (TIMBER-ALUMINIUM WINDOW)

HTPA-4

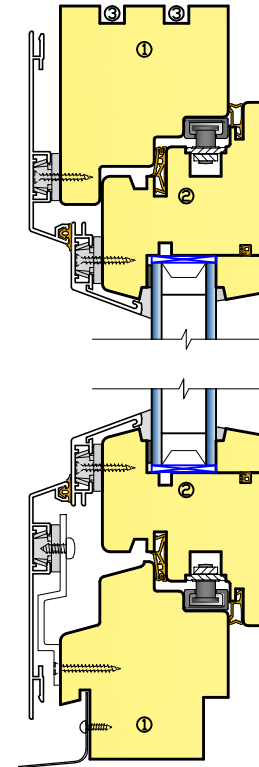

- window thermal conductivity U-1,24 W/m²K*
- glass thermal conductivity U-1,1 W/m²K
- 2 x seal
- 2 x glass **26mm** (4mm clear + 4mm clear/LowE)
- 1 x 18mm Swisspacer - synthetic composite material glass spacer profile
- 1 x argon filling

- ① window frame
- ② window sash
- ③ assembly foam grooves (at the sides and upper edge of the window frame)



* By Estonian standard EVS 837-1:2003 window maximum thermal conductivity is fixed as U-2,1 W/m²K