



WOODEN WINDOW ( TIMBER WINDOW ) - SOUND INSULATION SOLUTION **SIP-15**

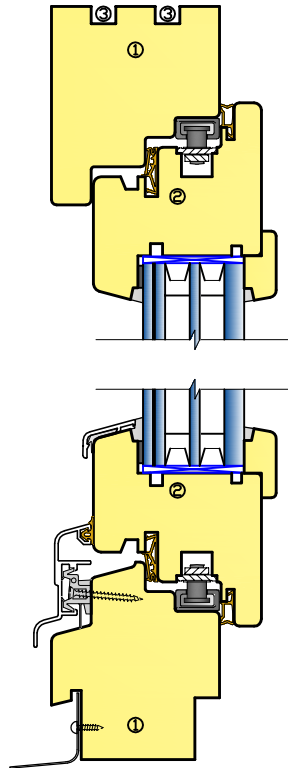

- window sound insulation  $R_w$ -43 dB\*\*
- glass sound insulation  $R_w$ -42 dB\* (SC)
- window thermal conductivity  $U$ -1,0 W/m<sup>2</sup>K
- glass thermal conductivity  $U$ -0,8 W/m<sup>2</sup>K
- 2 x seal
- 3 x glass **41mm** (9mm-44.2 clear/lam/LowE + 4mm clear + 8mm clear/LowE)
- 2 x 10mm Swisspacer - synthetic composite material glass spacer profile
- 2 x argon filling

- ① window frame
- ② window sash
- ③ assembly foam grooves (at the sides and upper edge of the window frame)



\* predictable glass datas

\*\* complete windows predictable datas

SC - Sound Control PVB Interlayer